

# STELLA 3AOX

## DOWNLIGHT WOOD/STONE INSTALLATION INSTRUCTIONS

---



---

**WARNING - RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY. FIXTURE IS INTENDED FOR INSTALLATION IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE, LOCAL AND FEDERAL SPECIFICATIONS. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING. CONNECTION OF LUMINAIRE TO POWERED DRIVER WILL RESULT IN PERMANENT DAMAGE TO THE LED AND VOIDED PRODUCT WARRANTY. RETAIN THESE INSTRUCTIONS FOR MAINTENANCE REFERENCE.**






MATERIALS USED FOR CEILING FIXATION SHOULD CONFORM TO THE RELEVANT BUILDING REGULATIONS.

---

## CUTOUT TABLE

FIXTURE	CUTOUT
STELLA 3AO WOOD/STONE INSTALLATION	Ø3.21" max DIAMETER

# FIXTURE INSTALLATION

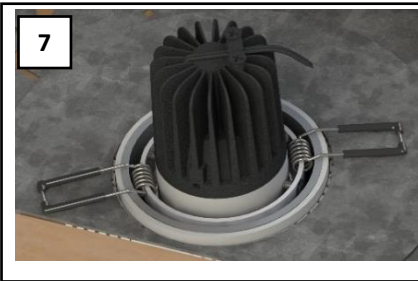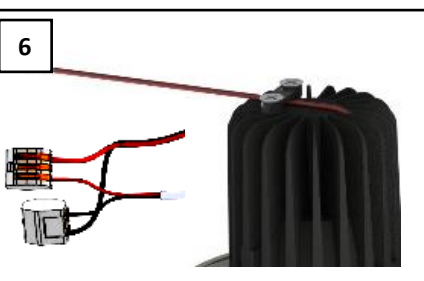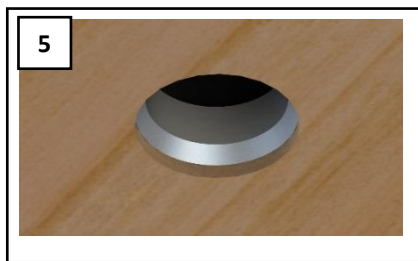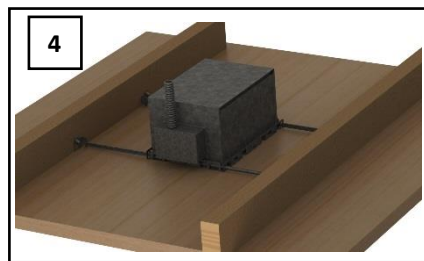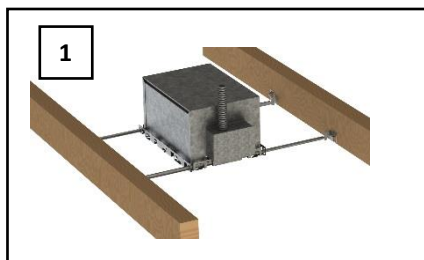

1. INSTALL THE ENCLOSURE BOX USING HANGER BARS. RUN CONDUIT TO THE J-BOX AND MAKE ELECTRICAL CONNECTIONS TO THE POWER SUPPLY. BLACK TO BLACK, WHITE TO WHITE AND GROUND TO GROUND. (FIGURE 1)
2. CUT A HOLE IN THE WOODEN CEILING PER THE CUT OUT TABLE. CNC MILLING CUT IS STRONGLY ADVISED. (FIGURE 2)
3. INSTALL PERFORATE ASSEMBLY FROM ABOVE THE CEILING BY SCREWING WITH SCREWS SUPPLIED BY OTHERS OR GLUE IT IN THE ENCLOSURE BOX OPENING(FIGURE 3).
4. INSTALL WOOD CEILING, MAKE SURE THE OPENING OF THE ENCLOSURE BOX ALIGNS WITH THE CUT OUT HOLE IN THE CEILING. (FIGURE 3 AND 4)
5. THREAD THE OUTSIDE RING ON THE PERFORATED ASSEMBLY FROM BELOW THE CEILING SET THE HEIGHT EDGE BY ROTATING IS CLOCKWISE(FIGURE 5)
6. CONNECT OUTPUT OF POWER SUPPLY TO THE FIXTURE USING PROVIDED WAGO CONNECTORS. RED TO RED, BLACK TO BLACK. (FIGURE 6)
7. OPEN SPRINGS AND INSERT THE FIXTURE INTO THE OPENING WITH THE HEATSINK FIRST. MAKE SURE THE WIRES ARE ALL THE WAY IN. (FIGURE 7)
8. IF THE FIXTURE IS ORIENTABLE, ORIENT TO THE DESIRED LOCATION. FINALLY, TURN THE FIXTURE ON. (FIGURE 8)

## WIRING DIAGRAM

